

600x600
mm

DOUBLE CHARGE

Tiles Collection

Wall Tiles

Floor Tiles

Vitrified Tiles

Sanitaryware

SEP.
2024

OUR PRODUCTS



AAC BLOCK



**PLYWOOD
BOARD
DOOR
HARDWARE**



Feel the
Impeccable
strength and
shine

Available in
**Glossy
Finish**



8mm
Thickness

Technical Specifications



95%
Reflection



Water
Repellent



Formidable
Strength



Stain
Resistant



Spanish White

**Double
Charge**
Vitrified
Tiles

**600x
600mm**

**Glossy
Finish**

8mm
Thickness





Spanish Wonder


**Double
Charge**
Vitrified
Tiles

**600x
600mm**

**Glossy
Finish**

8mm
Thickness



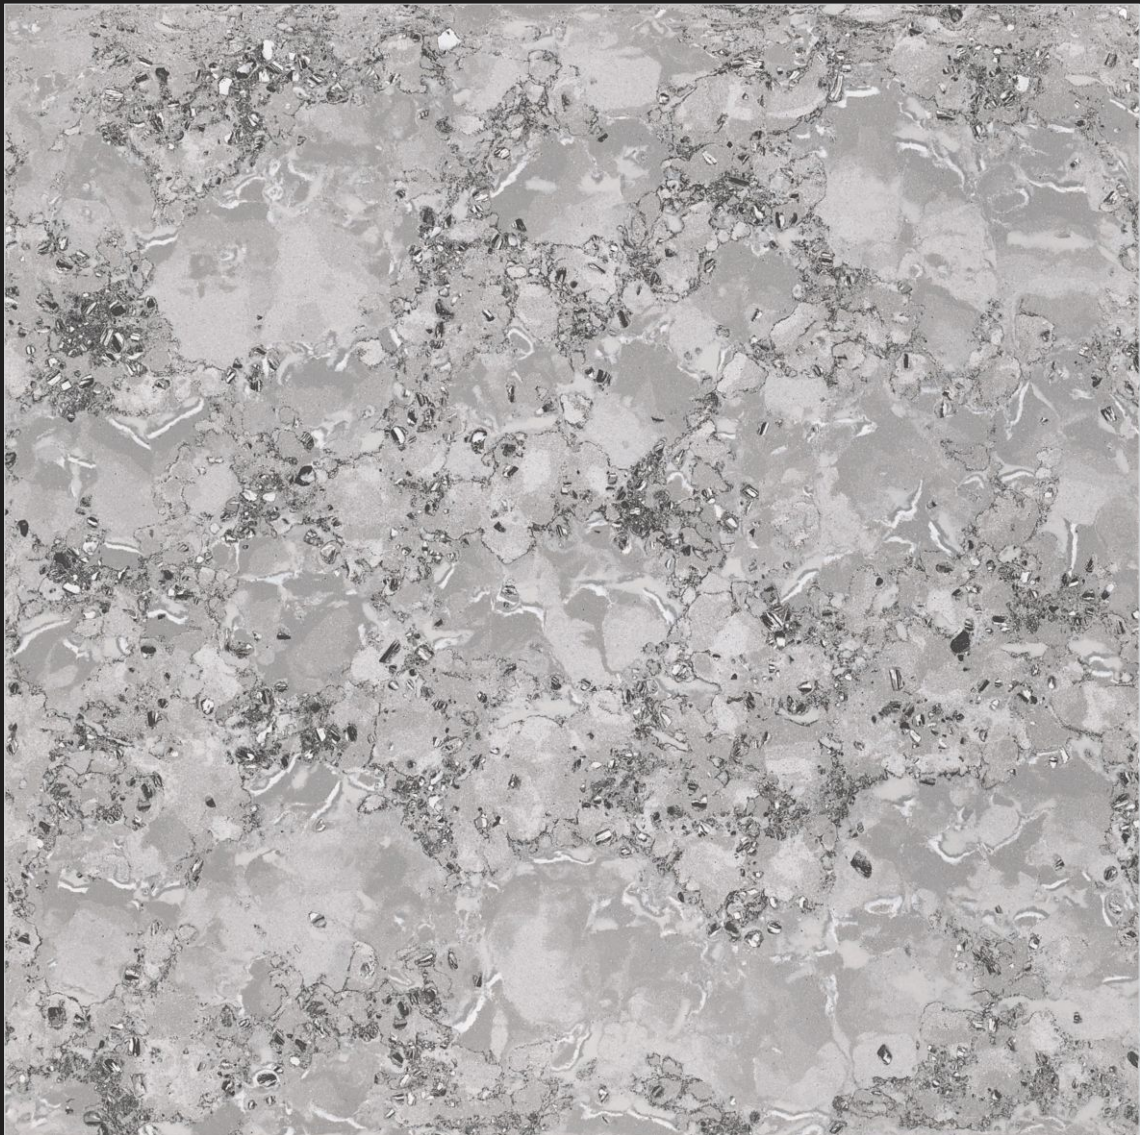

Spanish Ash

**Double
Charge**
Vitrified
Tiles

**600x
600mm**

**Glossy
Finish**

8mm
Thickness





Spanish Pista


**Double
Charge**
Vitrified
Tiles

**600x
600mm**

**Glossy
Finish**

8mm
Thickness



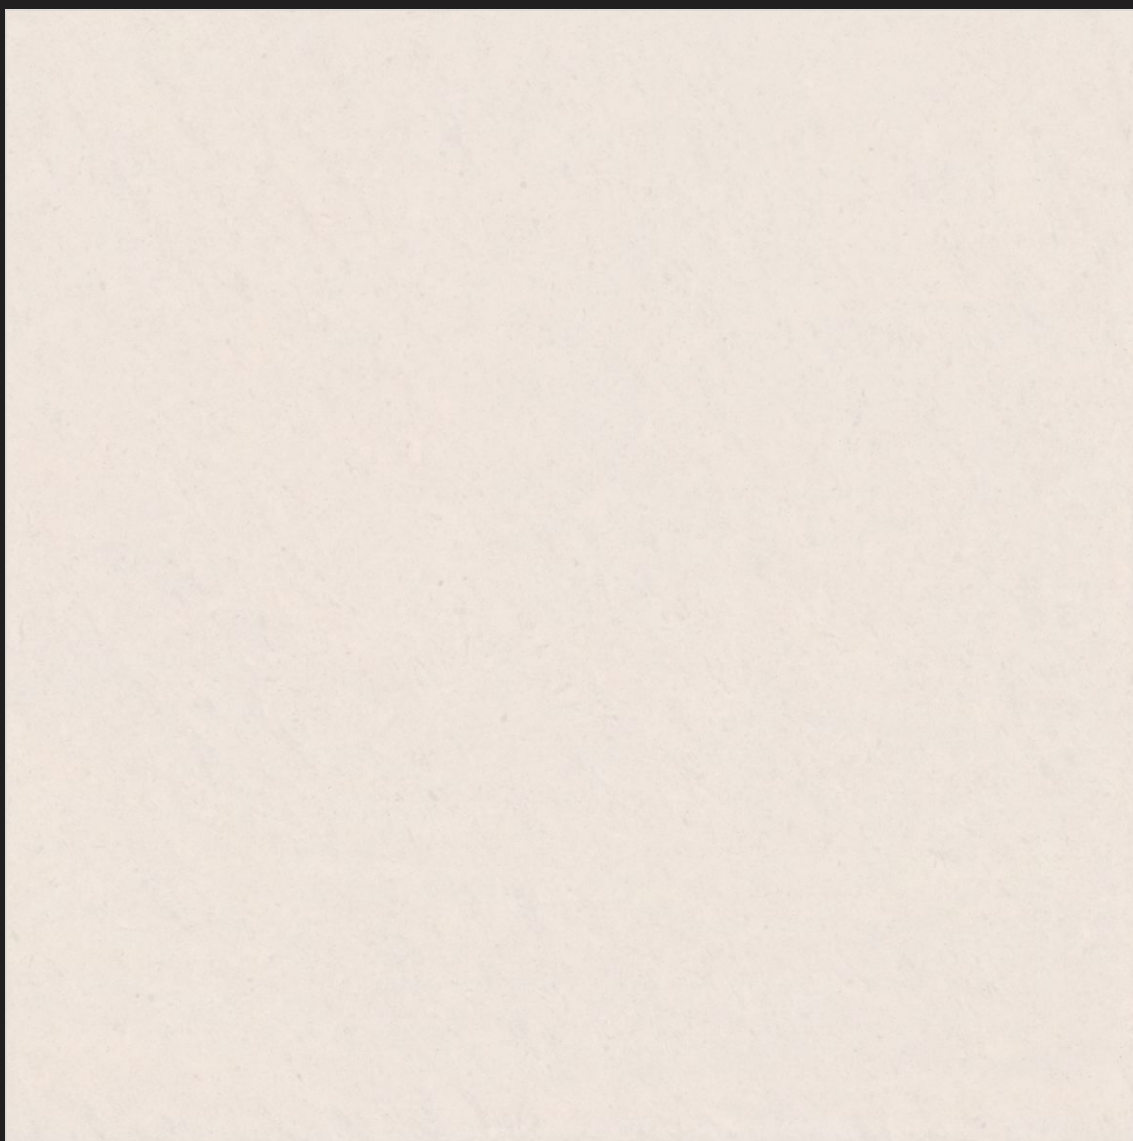

Imperial White

**Double
Charge**
Vitrified
Tiles

**600x
600mm**

**Glossy
Finish**

8mm
Thickness





Imperial Gold

**Double
Charge**
Vitrified
Tiles

**600x
600mm**

**Glossy
Finish**

8mm
Thickness





Imperial Pista

**Double
Charge**
Vitrified
Tiles

**600x
600mm**

**Glossy
Finish**

8mm
Thickness



Imperial Cadbury

**Double
Charge**
Vitrified
Tiles

**600x
600mm**

**Glossy
Finish**

8mm
Thickness






Imperial Stone

**Double
Charge**
Vitrified
Tiles

**600x
600mm**

**Glossy
Finish**

8mm
Thickness

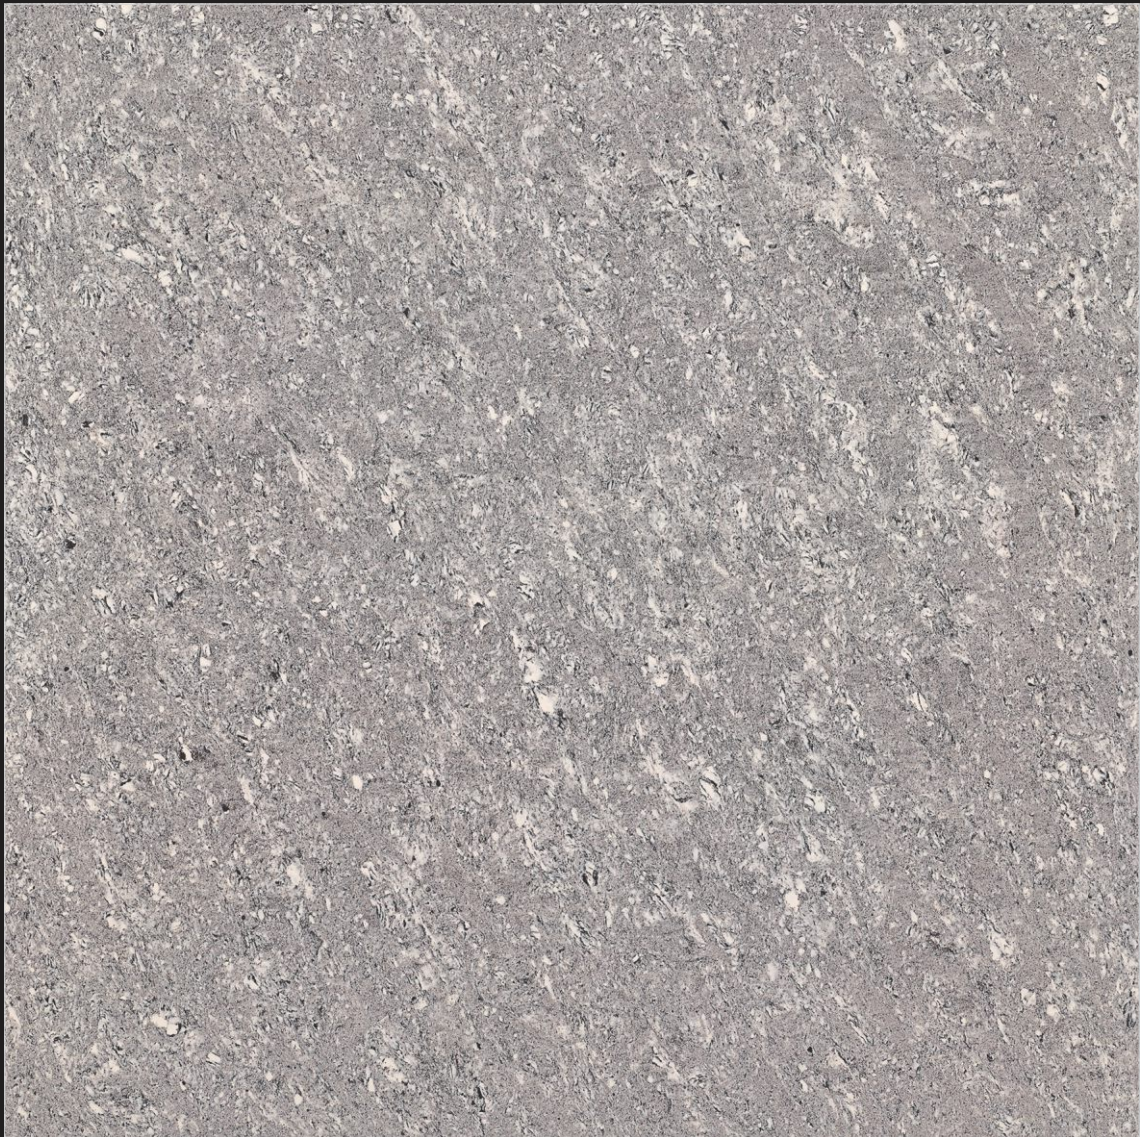

Imperial Ash


**Double
Charge**
Vitrified
Tiles

**600x
600mm**

**Glossy
Finish**

8mm
Thickness



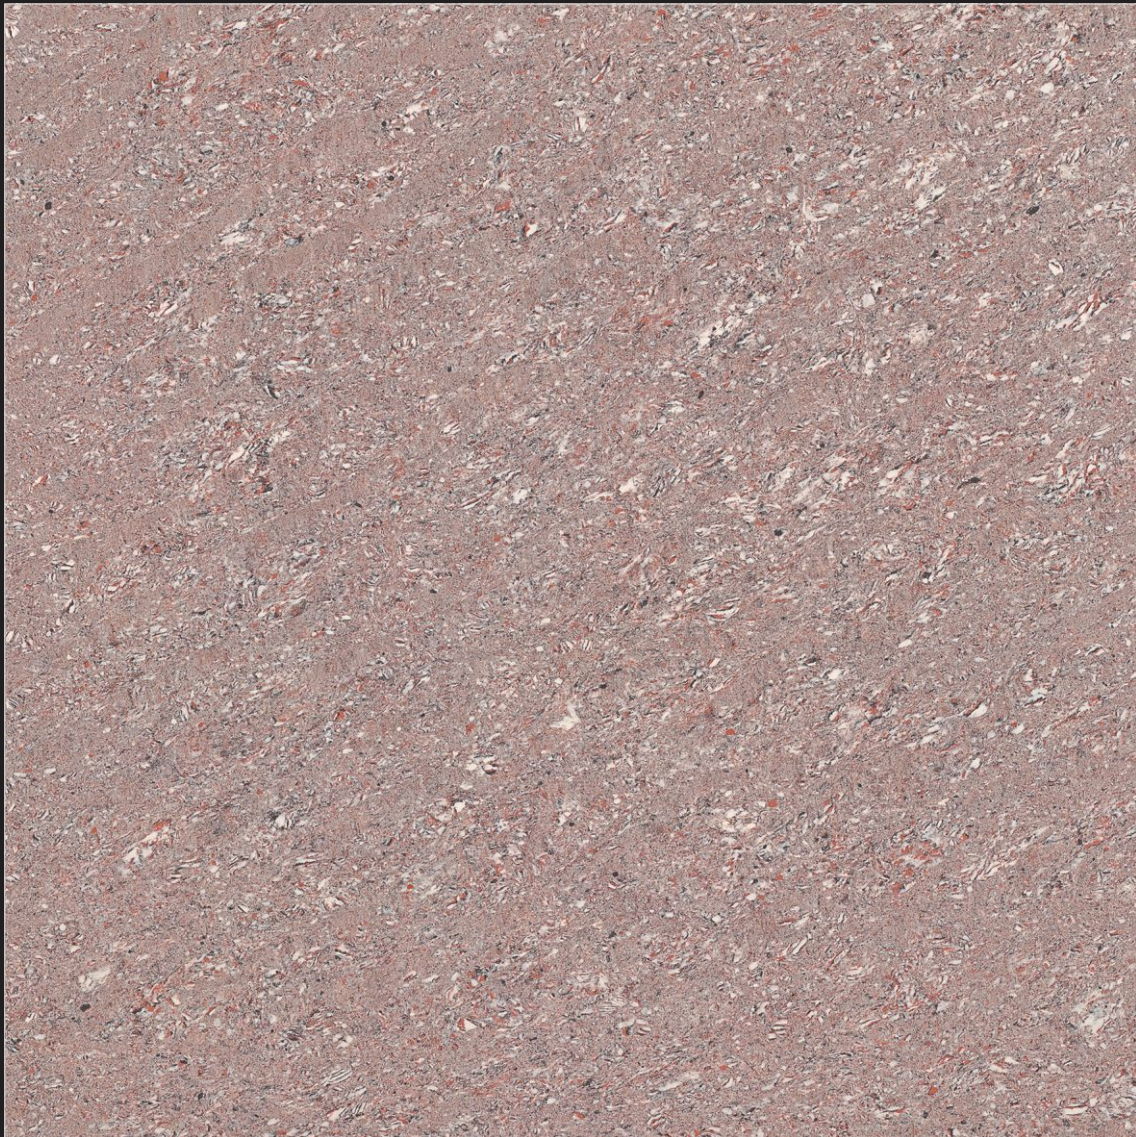

Imperial Bronze


**Double
Charge**
Vitrified
Tiles

**600x
600mm**

**Glossy
Finish**

8mm
Thickness



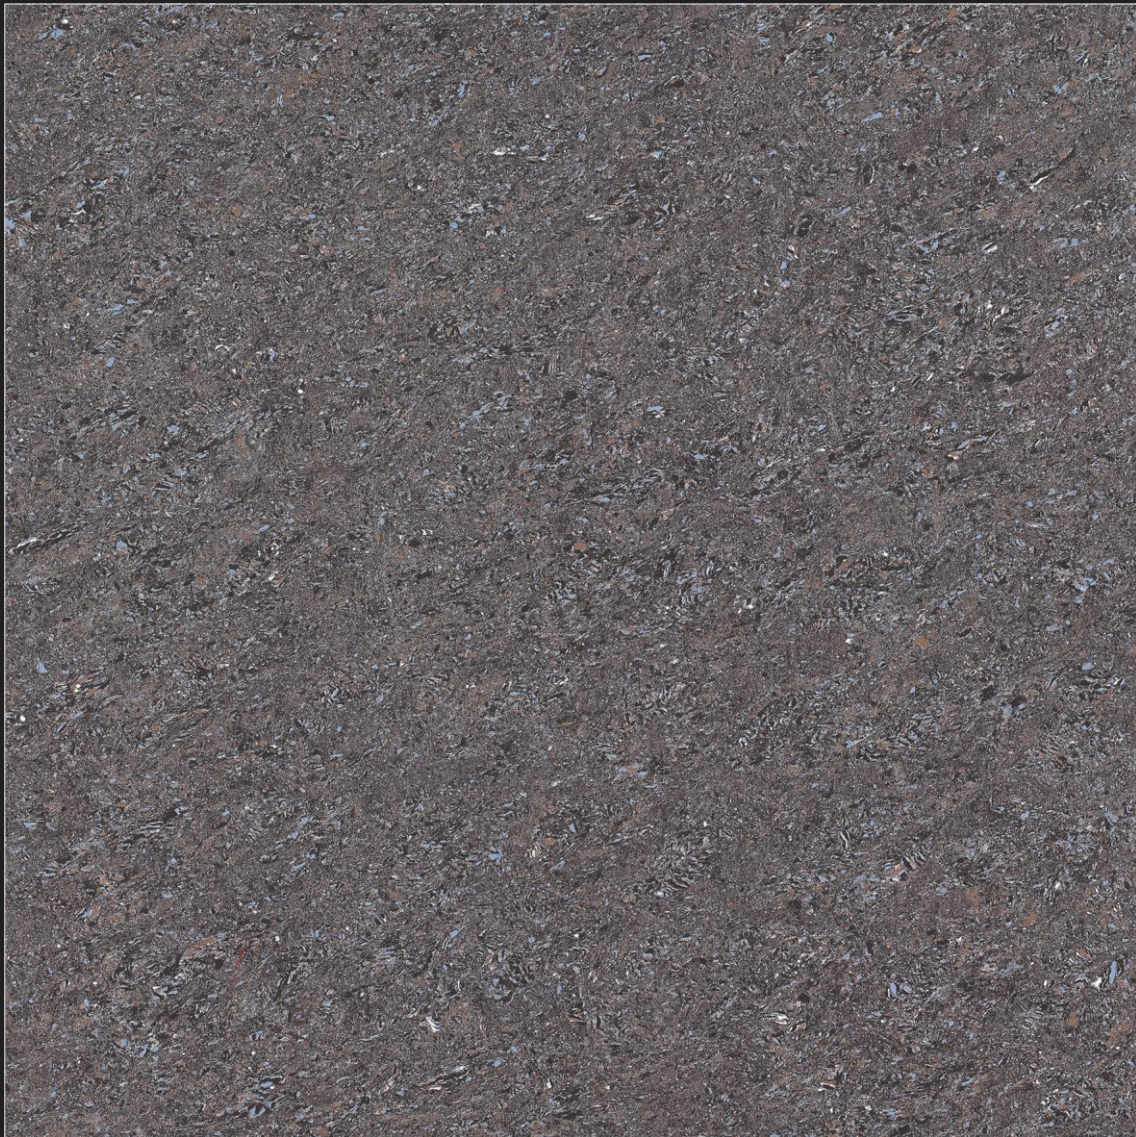

Imperial Majestic

**Double
Charge**
Vitrified
Tiles

**600x
600mm**

**Glossy
Finish**

8mm
Thickness



TECHNICAL SPECIFICATION

PROPERTY	International Std. ISO 13006/EN 176 Group Bla	OUR TILES VALUE	METHOD OF TESTING
Deviation in Length	± 0.6%	± 0.1%	EN 98
Deviation in Thickness	± 0.5%	± 0.1%	EN 98
Straightness of Sides	± 0.5%	± 0.3%	EN 98
Rectangularity	± 0.6%	± 0.3%	EN 98
Surface Flatness	± 0.5%	± 0.2%	EN 98
Water absorption *	< 0.5%	< 0.05%	EN 99
Mohs hardness *	> 6	> 6	EN 101
Flexural Strength *	> 27 N/mm ²	> 40 N/mm ²	EN 100
Abrasion resistance	< 204 mm ³	< 144 mm ³	EN 102
Skid Resistance (Friction Coefficient)	> 0.4	> 0.6	ASTM C-1028
Breaking Strength *	1113 N	2500 N	ASTM C-648
Density (g/cc)	> 2	> 2.4	DIN 51082
Frost resistance	Frost proof	Frost proof	EN 202
Chemical Resistance	No damage	No damage	EN 106
Thermal Shock Resistance	No damage	No damage	EN 104
Colour Resistance	No damage	No damage	DIN 51094
Thermal Expansion	< 9x10 ⁻⁶	< 9x10 ⁻⁶	EN 103
Stain Resistance	Resistant	Resistant	ISO 10545-14
Moisture Expansion	Nil	Nil	ISO 10545-10
Glossiness	-	89% Reflection	Glossmeter

PACKING DETAILS

SIZE	THICKNESS	NO. OF TILES/BOX	COVERAGE AREA/BOX		WT. OF BOX
600x600mm	8 mm	4 pcs.	1.44 sq. mtr.	15.50 sq. ft.	25.5 kg. (approx)

