

# ELEGANT PORCELAIN STONEWARE

*DOUBLE CHARGE VITRIFIED  
TILES COLLECTION*

**800 x 800 MM**

**READY  
STOCK  
IN BHUJ**



COLLECTION  
**2023**

**Ashapura**  
Sanitaryware | Tiles  
AN EXCLUSIVE SHOWROOM





BAILEY WHITE

DOUBLE CHARGE  
800x800 MM



BEST FOR  
CROWDED AREA



ADVANCED NANO  
MICRO POLISHED



BEST QC



100% REPLACEMENT  
FOR ITALIAN MARBLE



STAIN RESISTANCE



LOW WATER  
ABSORPTION



ABRASION  
RESISTANCE





# BAILEY CREMA

DOUBLE CHARGE  
800x800 MM



BEST FOR  
CROWDED AREA



ADVANCED NANO  
MICRO POLISHED



BEST QC



100% REPLACEMENT  
FOR ITALIAN MARBLE



STAIN RESISTANCE




LOW WATER  
ABSORPTION



ABRASION  
RESISTANCE



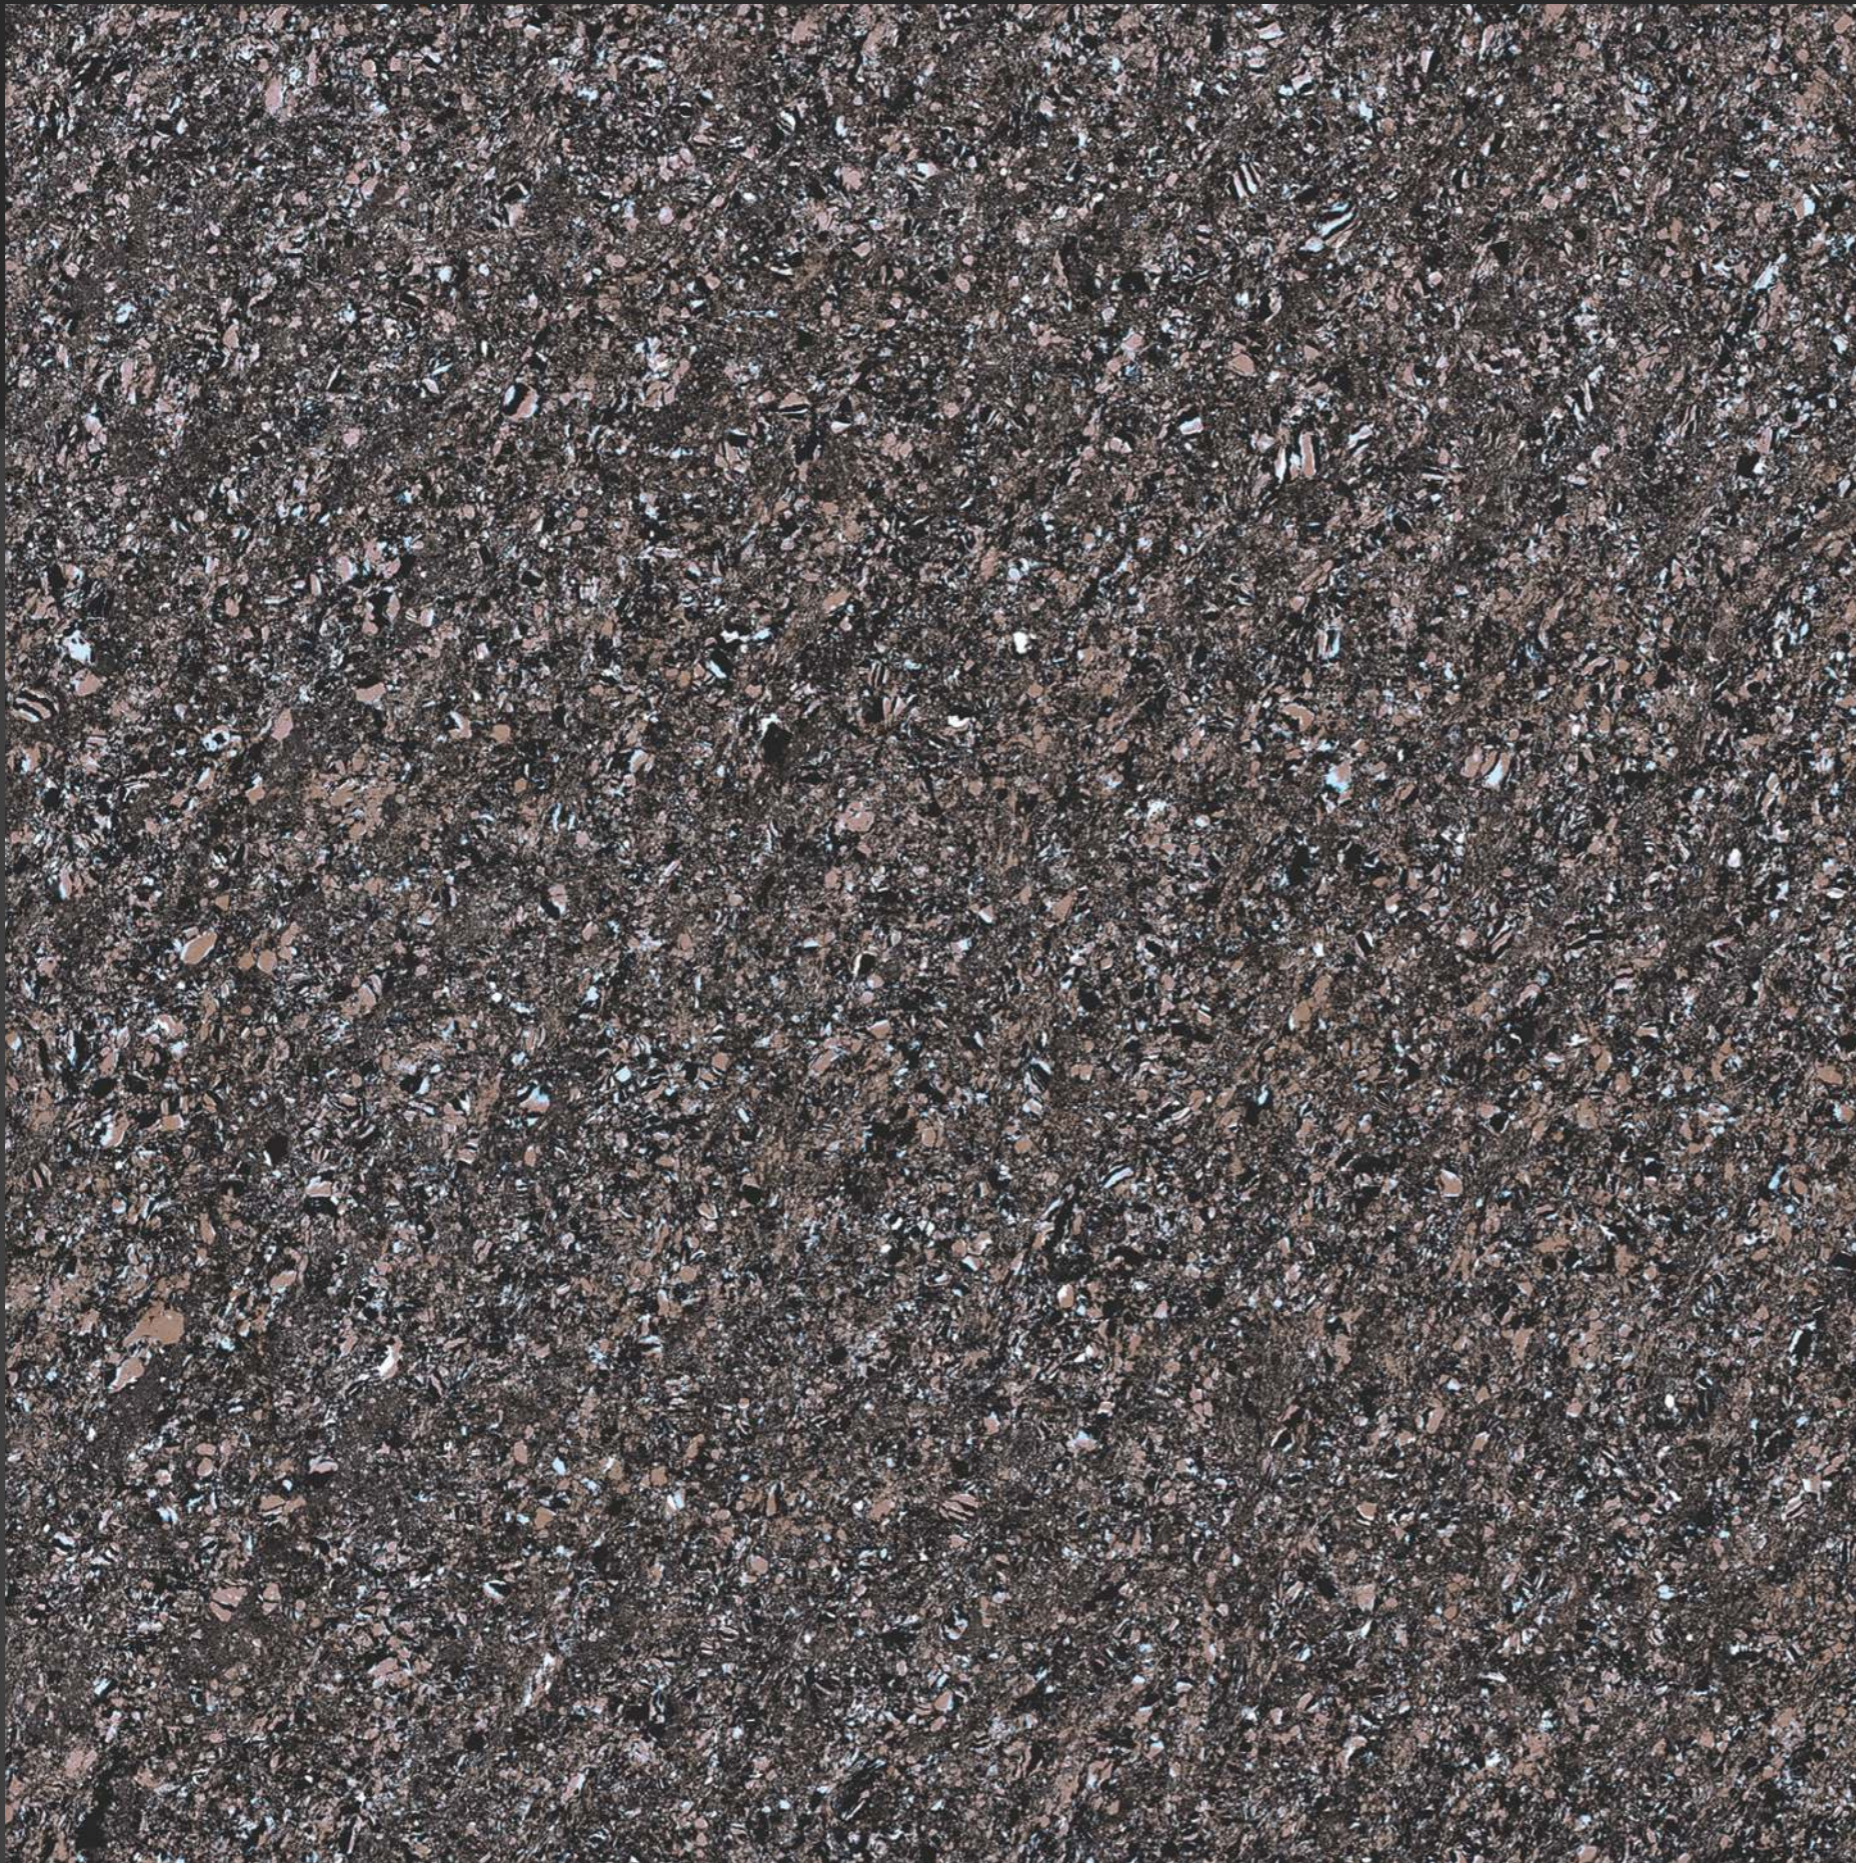

FIANTO CHOCO BLUE

DOUBLE CHARGE  
800x800 MM



BEST FOR  
CROWDED AREA



ADVANCED NANO  
MICRO POLISHED



BEST QC



100% REPLACEMENT  
FOR ITALIAN MARBLE



STAIN RESISTANCE




LOW WATER  
ABSORPTION



ABRASION  
RESISTANCE





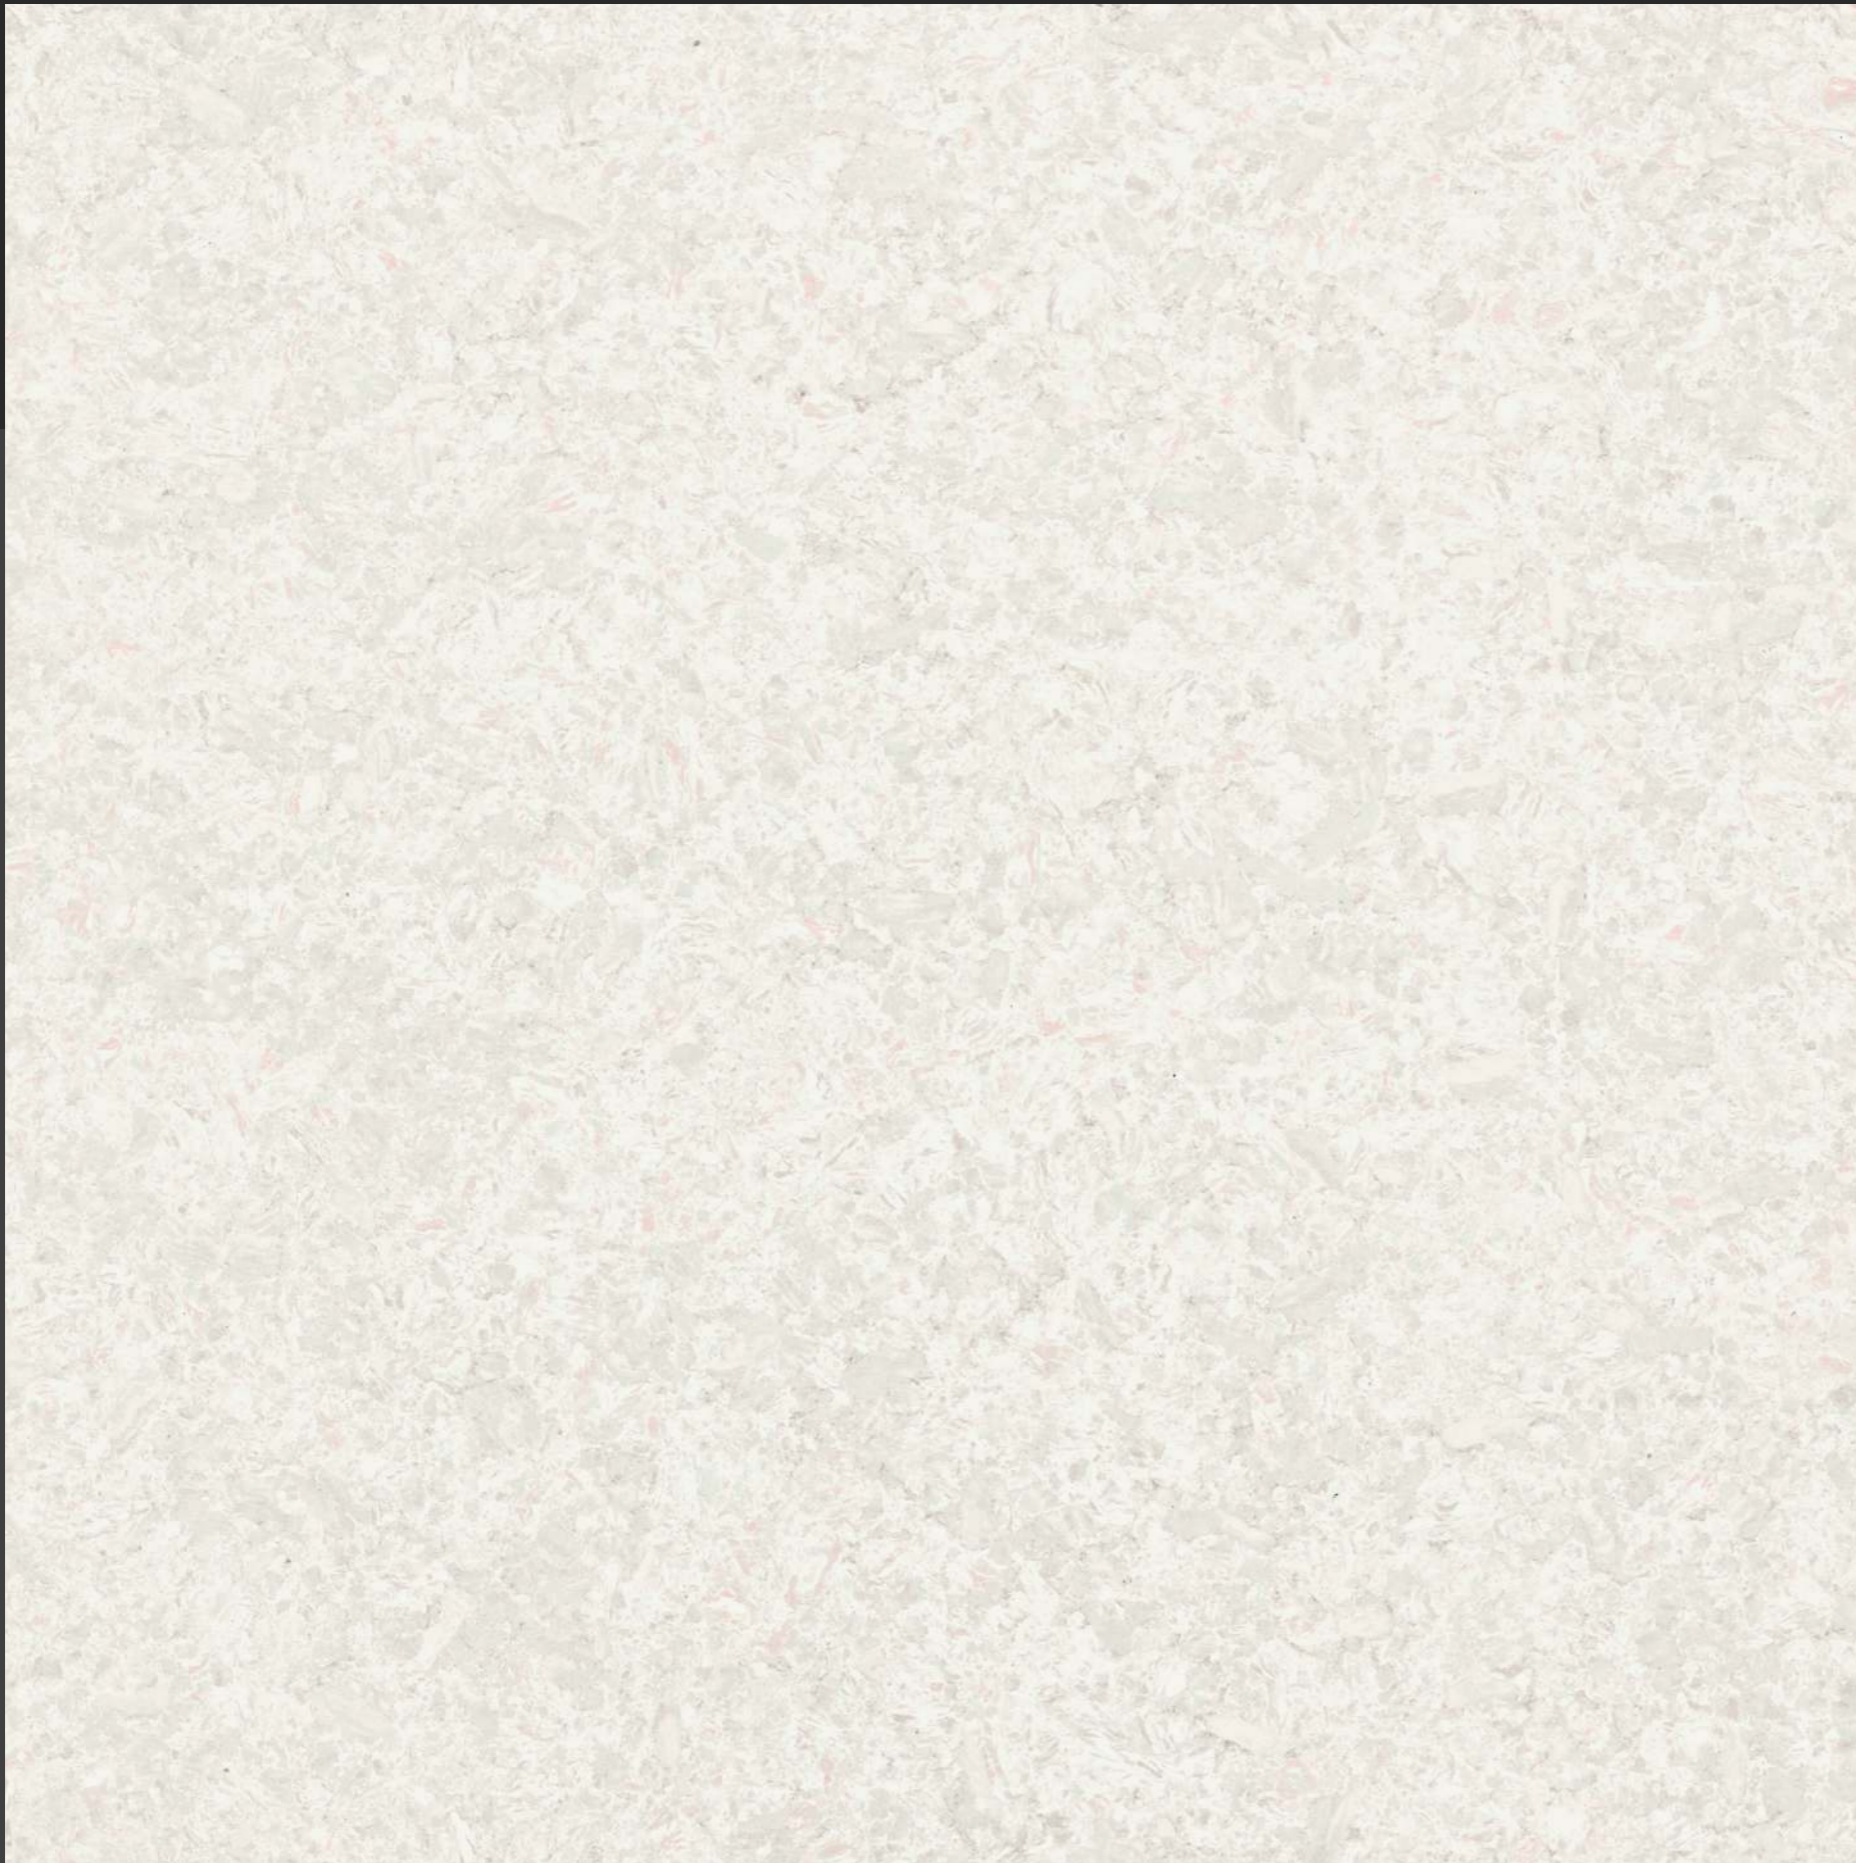

# BOSTON WHITE

## DOUBLE CHARGE 800x800 MM




BEST FOR  
CROWDED AREA



ADVANCED NANO  
MICRO POLISHED



BEST QC



100% REPLACEMENT  
FOR ITALIAN MARBLE



STAIN RESISTANCE



LOW WATER  
ABSORPTION



ABRASION  
RESISTANCE





ITALIAN WHITE

DOUBLE CHARGE  
800x800 MM

 BEST FOR CROWDED AREA

 ADVANCED NANO MICRO POLISHED

 BEST QC

 100% REPLACEMENT FOR ITALIAN MARBLE

 STAIN RESISTANCE

 LOW WATER ABSORPTION

 ABRASION RESISTANCE





ITALIAN CREMA

DOUBLE CHARGE  
800x800 MM

 BEST FOR CROWDED AREA

 ADVANCED NANO MICRO POLISHED

 BEST QC

 100% REPLACEMENT FOR ITALIAN MARBLE

 STAIN RESISTANCE

 LOW WATER ABSORPTION

 ABRASION RESISTANCE

## TECHNICAL SPECIFICATIONS

CHARACTERISTICS			
DIMENSION & SURFACE QUALITY	INTERNATIONAL SPECIFICATIONS ISO 13006/EN 176 GROUP & IS 15622 : 2006	NOKEN VALUE	METHOD OF TESTING
Deviation In Length & Width	± 0.6%	± 0.1%	ISO 10545 Pt2
Deviation In thickness	± 5%	± 3%	ISO 10545 Pt2
Straightness of sides	± 0.5%	± 0.1%	ISO 10545 Pt2
Rectangularity	± 0.6%	± 0.2%	ISO 10545 Pt2
Surface Flatness	± 0.5%	± 0.2%	ISO 10545 Pt2
Glossiness	Gloss meter	min 90% Reflection	ISO 10545 Pt2
PHYSICAL & THERMAL PROPERTIES			
Water Absorption	< 0.5%	< 0.05%	ISO 10545 Pt3
Mohs Hardness	> 6	8	EN 101
Flexural Strength (Mor)	> 35N/m <sup>2</sup>	≥ 46 N/mm <sup>2</sup>	ISO 10545 Pt4
Surface Abrasion Resistance	< 175 mm <sup>3</sup>	< 145 mm <sup>3</sup>	ISO 10545 Pt6
Skid Resistance	> 0.4	> 0.4	ISO 10545 Pt17
Breaking Strength	1113 N	2800 N	ISO 10545 Pt4
Density (g/cc)	> 2	> 2.4	DIN 51082
Frost Resistance	Frost Proof	Frost Proof	ISO 10545 Pt12
Thermal Shock Resistance	No Damage	No Damage	ISO 10545 Pt9
Thermal Expansion	< 9 x 10 <sup>-6</sup>	< 6 X 10 <sup>-6</sup>	ISO 10545 Pt8
Moisture Expansion	Nil	Nil	ISO 10545 Pt10
CHEMICAL PROPERTIES			
Chemical Resistance	No Damage	No Damage	ISO 10545 Pt13
Colour Resistance	No Damage	No Damage	DIN 51094
Stain Resistance	Resistant	Resistant	ISO 10545 Pt14

\*Not applicable for glossy finishes

\*\* These parameters are not applicable for structured punches

ADVANCED NANO  
**DOUBLE  
CHARGE**  
800x800mm

## PACKING DETAILS

SIZE	NO. OF TILES PER BOX	COVERAGE AREA IN SQ. MT.	WEIGHT/BOX
800x800mm	3	1.92/20.67	36kg(Approx)



BEST FOR CROWDED AREA



ADVANCED NANO MICRO POLISHED



STAIN RESISTANCE



BEST QC



ABRASION RESISTANCE



LOW WATER ABSORPTION



100% REPLACEMENT FOR ITALIAN MARBLE

